

B300

Hydraulic Patch Fitting



LISTED

Product Features:

- Fixed power size 3
- Adjustable closing & latching speed
- Maximum door control opening angle at 170°
- Mechanical hold-open at 90° or 105°
(non-UL certified option upon request & discussion)

Power size	3
Max Door width [Inches (mm)]	39 $\frac{3}{8}$ [1000]
Max Door weight [lbs (kg)]	220 [100]
Available glass thickness [Inches (mm)]	$\frac{5}{16}$ - $\frac{33}{64}$ [8-13]



★ According to UL 228 testing regulation, the door weight over 125 lbs (57kg) may not fully comply with UL 228 standard.



Finishes:

- US32D (satin stainless steel) or other finishes upon request & discussion

Dimensions:

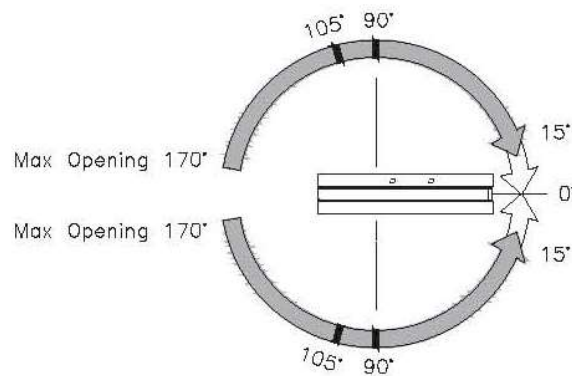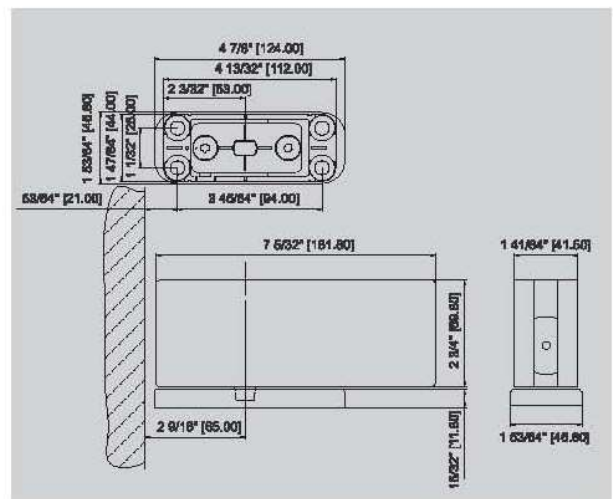

Application Ranges:

- Suitable for double action door
- Available for light & medium duty door

Exclusively for:



HARLE
PHILIPPINES
An ISO9001:2015 Certified Company



Certificate Registration No. 44 100 102044

Unit 408 SEDCCO Building, Rada corner Legazpi Sts.
Legazpi Village, Makati City, Philippines
Tel. No. 8892-8989 / 8553-8988 Fax No. 8892-1688
Website: www.harlephils.com
E-Mail: sales@harlephils.com