




21 INCHES BIG SCREEN CONTACTLESS TEMPERATURE SCANNING DEVICE WITH FACE RECOGNITION AND HAND SANITIZER

THE NEW NORMAL EXPERIENCE

Another GUEST CONTROL SYSTEMS LIMITED innovative creation, the GuestControl™ ScanPower™ TSM-5081 is a revolutionary contactless 3-in-1 Temperature Scanning, Hand Sanitization and Big Screen Message Display Terminal with alarms and reports. This innovative device creates a breakthrough in the NEW NORMAL for safety management and access control. GuestControl™ ScanPower™ TSM-5081 unique intelligent big screen display temperature measuring machine complete with face recognition and hand disinfection unit, can be installed in the main entrances of crowded places such as museums, cinemas, theme parks, stadiums, gyms, schools, hotels, shopping malls, office buildings, banks, government halls and various public areas, etc. provide both safety access control and information display. It monitors the temperature of employees, customers and visitors in real time, and provide information & promotional display effectively helping to prevent virus spreads.

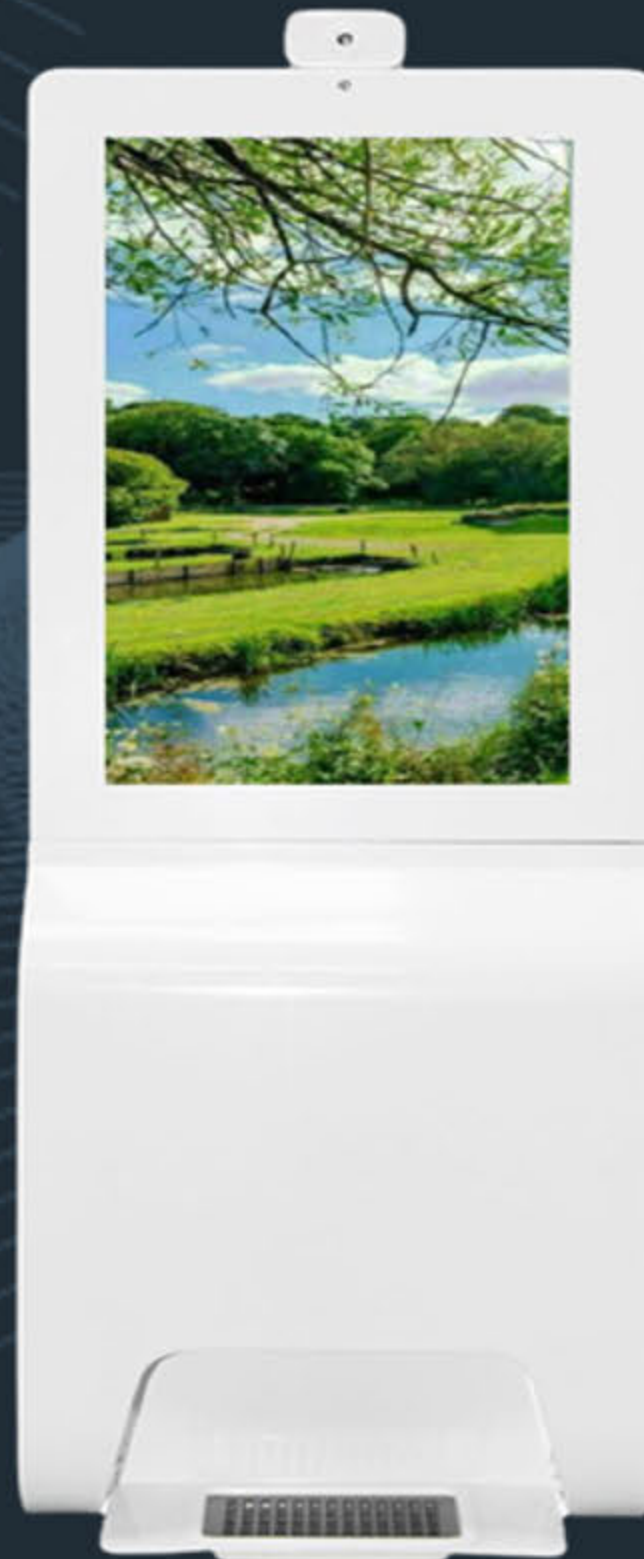

GuestControl™ ScanPower™ TSM-5081, A "must have" revolutionary and practical masterpiece that keeps your facility safe and boost your business performance

GUESTCONTROL™
The Choice Of Excellence

INTELLIGENT
INNOVATIVE
POWERFUL
www.guestcontrol.net

SCANPOWER™ 21 INCHES BIG SCREEN TEMPERATURE SCANNER WITH FACE RECOGNITION AND CONTACTLESS DISPENSER

Model: TSM-5081

SCANPOWER™ TEMPERATURE SCANNER WITH FACE RECOGNITION AND CONTACTLESS DISPENSER



Wall Mounting



Floor Standing

FEARURES HIGHLIGHTS

- IR Automatic Dispenser / Hand Sanitizer
- Android 7.1, Cloud Account CMS
- Wall mount / Floor Standing Display
- Flexible Front Maintenance
- Big Bottle Volume
- Water Level Detection
- Face recognition temperature measurement




SPECIFICATIONS

PANEL SPECIFICATIONS			
LCD Size	21.5inch	Area	476.64(H) × 268.11(V) mm
Resolution	1920*1080	View Angle	178/178/178/178
Display Ratio	16:9	Response Time	6ms
Brightness (nits)	350cd/m2	Life (Hours)	50000
Contrast	1000:1	Power Input	AC 100-240V
INPUT PORTS			
USB 2.0	x2	SD	x1
LAN	X1	SIM card reader	X1 (for 4G use)
KIOSK OPERATING SYSTEM SPECIFICATIONS			
Operate System	Android 7.1	RAM	2GB
CPU	Rockchip RK3288 quad-core ARM Cortex-A17	ROM	8GB
SUPPORTED MEDIA FORMAT			
Video	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV/WMV/DIVX/RM/RMVB, support super HD 1080P video		
Image	JPG/JPEG/PNG/BMP		
Audio	MP3/WMA/AAC etc		
Scrolling text	TXT/WORD/EXCEL/PDF		
FUNCTIONS			
Rolling subtitles	Display the subtitles at the bottom of screen with the video and picture, txt	Software Update	Software update
Power Memory	Support program replaying from the setting time before the power failure	Display Mode	Support Portrait & Landscape display mode
Split Screen	Support 1080p video, 1080p picture, picture, video and subtitles split-screen function.	Play mode	Repeat all, single repeat, order play
Low water level monitoring	Yes	Email reminder function	Yes
Temperature measurement	Yes	Face recognition	Yes
Face mask detection	Yes	High temperature alarm	Yes
AUTO DISPENSER			
Type	sensor	Inductive distance	3-5CM
Bottle Volume	3000 ml	Dispensing life	500000 times
Dispense dosage	Gel-1ml, Liquid-1ml, Foam-0.5ml / Time	Input	AC/12V100-240V
Pumps	Standard pump for Liquid soap, Gel	Water level detection	Yes
CAMERA			
Highest effective pixel	1920 (H) *1080 (V)	Sensitivity (sensitivity)	4600mV/Lux-sec
Object distance	5CM-100M	Signal to noise ratio(s/n RATION)	48.9dB
Dynamic Range	95dB	Supported resolution and frame rate (MJPEG default)	1920*1080: 30 frames 1280*720: 30 frames 800*600: 30 frames 640*480: 30 frames
Automatic exposure control AEC	Support	Auto white balance AEB	Support
Automatic gain control AGC	Support	Adjustable parameters	Brightness Contrast Color saturation Hue Sharpness Gamma White balance Backlight contrast Exposure



TEMPERATURE MEASUREMENT SENSOR			
Sensor	MLX90621ESF-BAB	Resolution	16*4
Detection distance	30-50CM/80-100CM	Detection temperature resolution	0.01°C
Temperature detection accuracy	±0.3°C	Target temperature detection range	0--45°C
Temperature data output rate	4Hz/sec		
GENERAL INFORMATION			
Material	Hardware Bright Painting (Iron)	Net Weight	8.5 kg
Standard Color	White	Package	Carton
Product Size	370mm*58.5mm*1138mm	Mount	wall mount

MEASUREMENTS

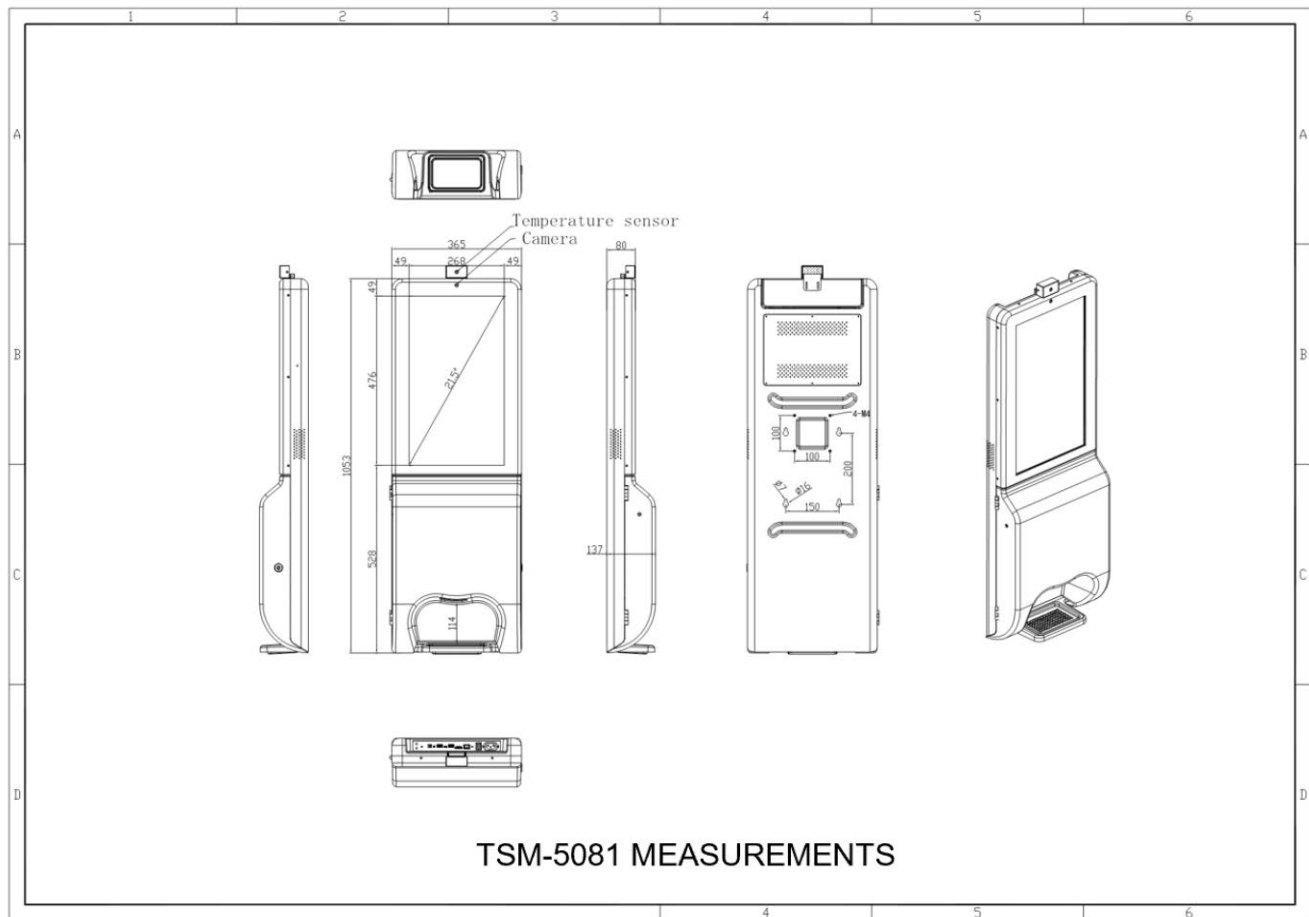

**HARLE HOSPITALITY
EQUIPMENT PHILS., INC.**

Unit 408 SEDCCO1 Bldg., 120 Rada corner Legazpi Sts.
Legazpi Village, Makati City 1229, Philippines
Tel. No. (632) 8892-8989 Fax No. (632) 8892-1688
E-Mail: sales@harlephils.com

www.harlephils.com