



Standalone Fingerprint Keypad System **DG-ea400** Fingerprint Biometric & Keypad Access Control



Fingerprint Scanner
for Secure and Easy Access




Standard Features

- Narrow, mullion style mounting design
- 100 fingerprint capability
- 100 PIN codes, 1 to 6 digits
- Keypad tamper lockout
- Red, green and yellow LED for status and programming feedback
- Configurable audible annunciator: Keypad Entry, Keypad Active, Access Denied
- Fail-secure or Fail-safe capable
- Request to Exit input, Alarm output

3 User Modes

- Fingerprint or Code
- Fingerprint Only
- Code Only

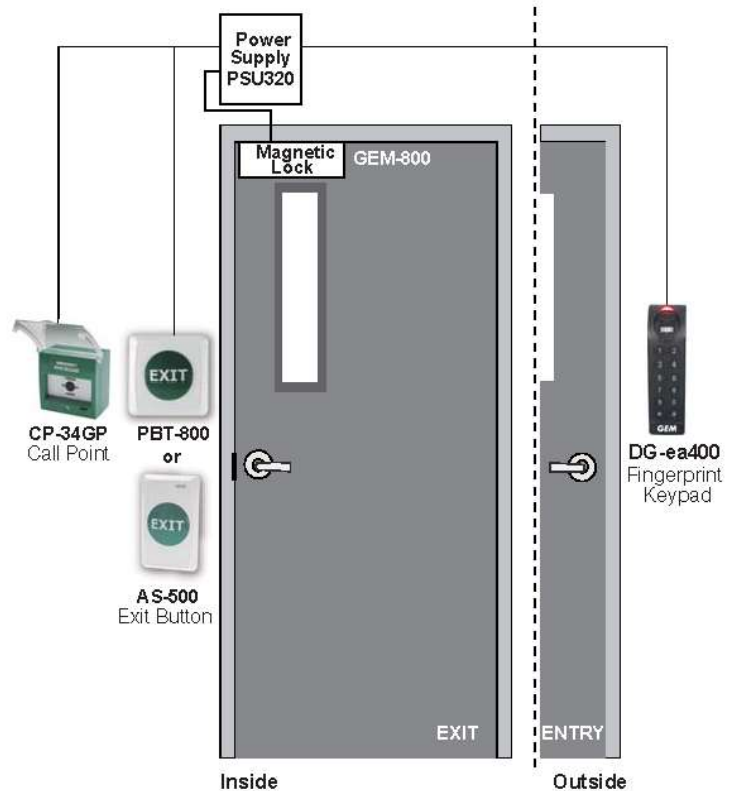

Specifications

Voltage	Current	Alarm	Relay	Keypad Output	Wiring	Temperature	Humidity	Color	Dimensions
12-24VAC/DC @2A	Up to 80 mA	5VDC @ 25mA	12VDC @ 2A	32-bit Wiegand	Pigtail	14°F~149°F (-10°C to +65°C)	0% to 95% Non-condensing	Black	1 3/4" x 5 15/16" x 1 7/16" (44 W x 150 H x 36 D mm)



HARLE
PHILIPPINES
An ISO9001:2015 Certified Company



Unit 408 SEDCCO Building, Rada corner Legazpi Streets, Legazpi Village, Makati City
Tel. Nos.: (632) 8-892-8989 / (632) 8-553-8988 * Fax No.: (632) 8-892-1688
E-Mail: sales@harlephils.com * Website: www.harlephils.com